




## CHIP LED 0805 Side Light




**taping:** 8 mm tape with 4000/reel,

**viewing angle:** Lambertian Emitter (120°)

**Welding:** IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

### Package Outlines

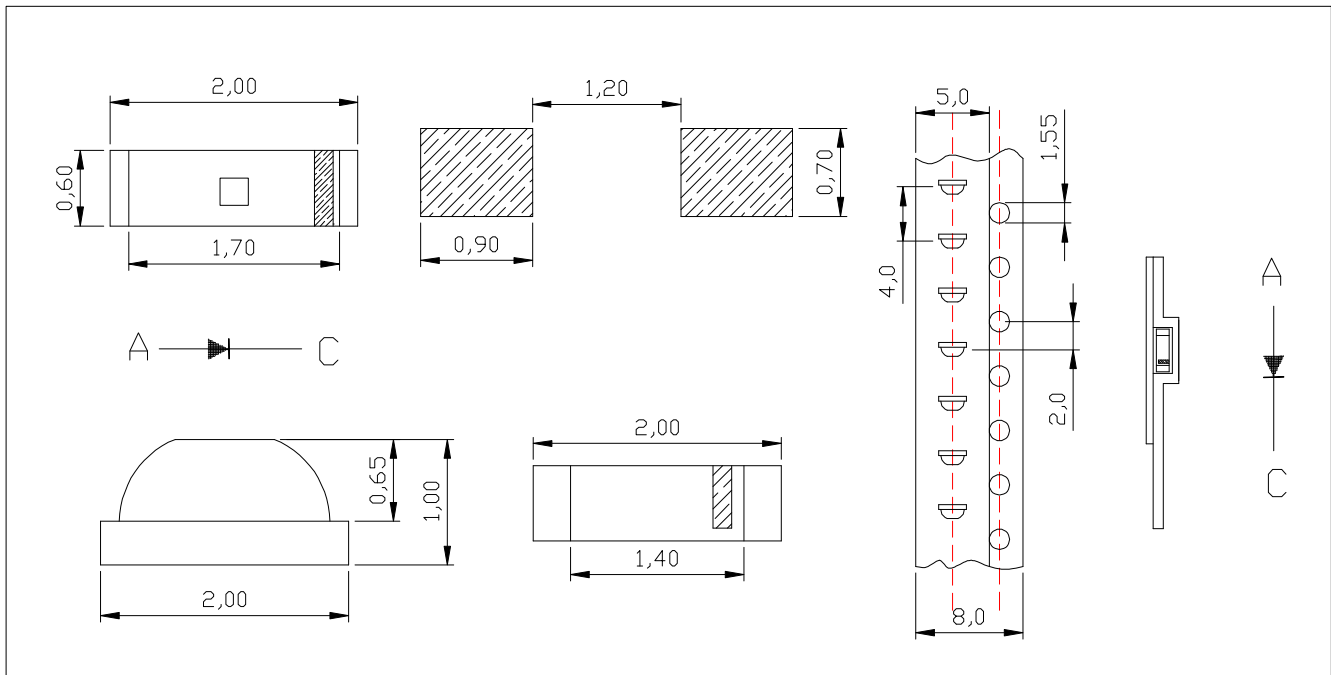

Note: 1. All dimensions are in millimeters (inches).  
 2. Tolerance is ±0.1mm unless otherwise noted.

### Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
0805Side Light	White	$I_F = 20mA$	X0.30/Y0.30	50-200mcd
0805Side Light	Red	$I_F = 20mA$	615-645nm	30-150mcd
0805Side Light	Yellow	$I_F = 20mA$	586-592nm	30-120mcd
0805Side Light	Yellow Green	$I_F = 20mA$	565-576nm	8-56mcd
0805Side Light	True Green	$I_F = 20mA$	515-525nm	100-420mcd
0805Side Light	Blue	$I_F = 20mA$	460-475nm	30-150mcd

**Note:** Please contact the salesman for detailed specifications!