




CHIP LED 1209




taping: 8 mm tape with 3000/reel,

viewing angle: Lambertian Emitter (120°)

Welding: IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

Package Outlines

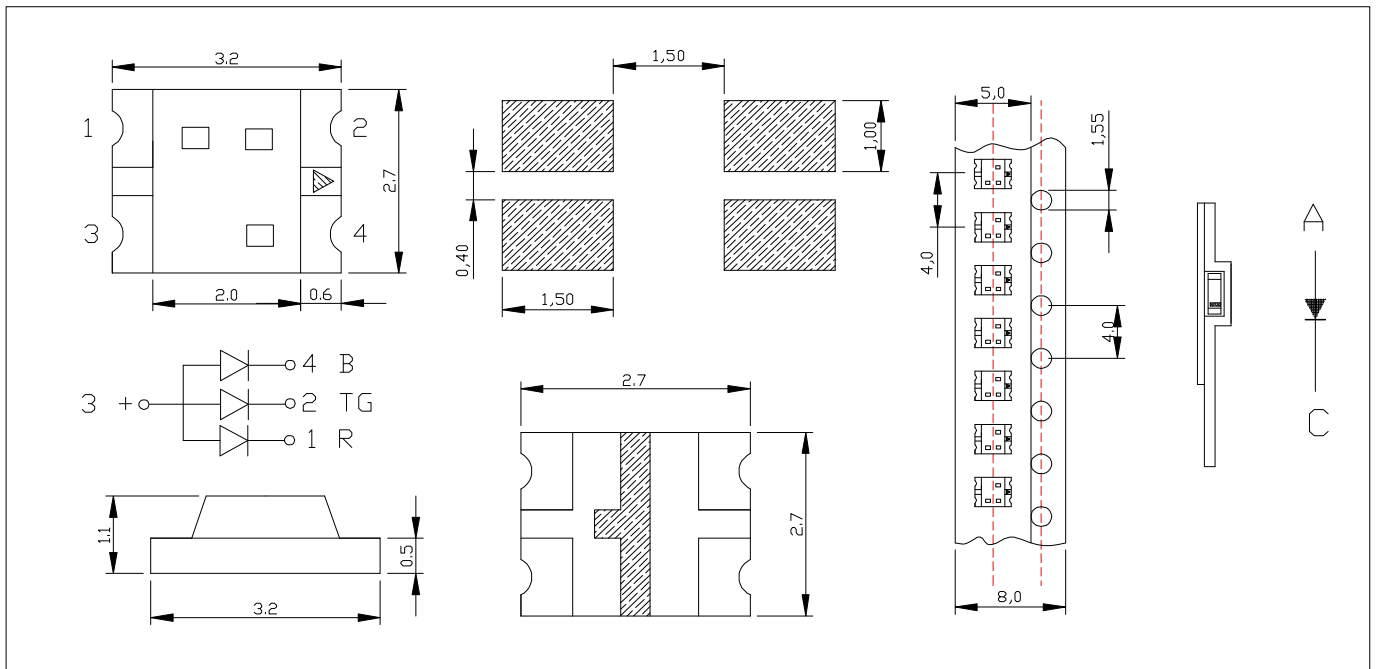

- Note:*
1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.1mm unless otherwise noted.

Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
1209W CHIP	White	$I_F = 20mA \times 3$	X0.30/Y0.30	680-1800mcd
1209RGB CHIP	Colored	$I_F = 20mA \times 3$	X0.30/Y0.30	560-1500mcd
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Note: Please contact the salesman for detailed specifications!