



TOP LED 2835




taping: 8 mm tape with 2000/reel,

viewing angle: Lambertian Emitter (120°)

Welding: IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

Package Outlines

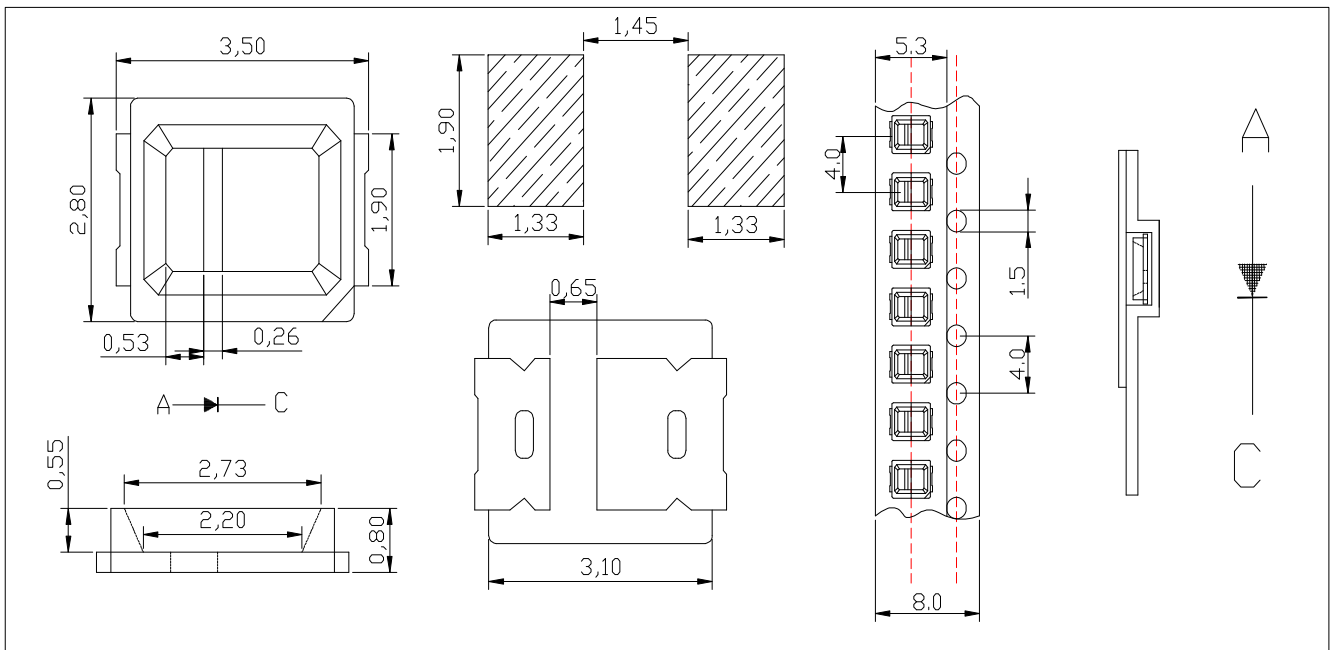

Note: 1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.1mm unless otherwise noted.

Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
2835W TOP	White	$I_F = 60mA$	X0.30/Y0.30	18-26LM
2835R TOP	Red	$I_F = 60mA$	615-645nm	4-7LM
2835YG TOP	Yellow	$I_F = 60mA$	586-592nm	4-7LM
2835TG TOP	True Green	$I_F = 60mA$	515-525nm	15-24LM
2835B TOP	Blue	$I_F = 60mA$	460-475nm	4-7LM

Note: Please contact the salesman for detailed specifications!