



## TOP LED 3014




**taping:** 8 mm tape with 3000/reel,

**viewing angle:** Lambertian Emitter (120°)

**Welding:** IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

### Package Outlines

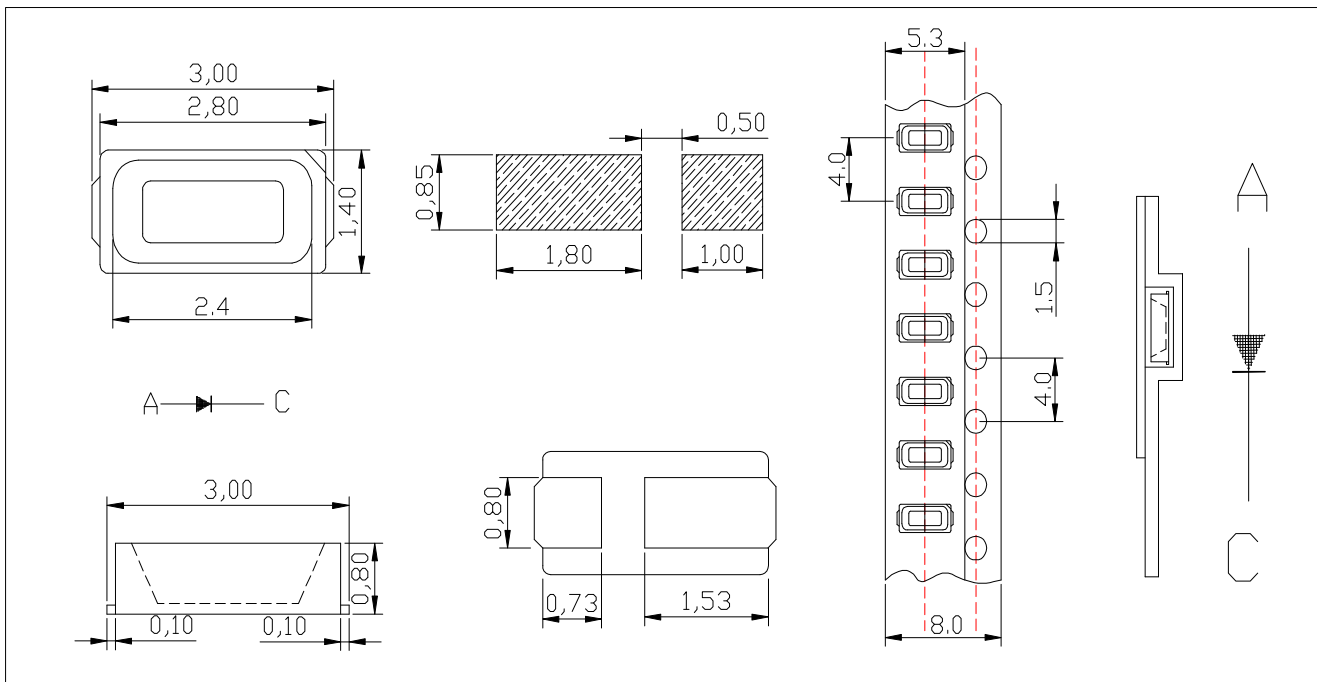

Note: 1. All dimensions are in millimeters (inches).

2. Tolerance is ±0.1mm unless otherwise noted.

### Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
3014W TOP	White	$I_F = 30mA$	X0.30/Y0.30	5-15LM
3014R TOP	Red	$I_F = 30mA$	615-645nm	3-5LM
3014Y TOP	Yellow	$I_F = 30mA$	586-592nm	3-5LM
3014TG TOP	True Green	$I_F = 30mA$	515-525nm	4-12LM
3014B TOP	Blue	$I_F = 30mA$	460-475nm	3-5LM

**Note:** Please contact the salesman for detailed specifications!