




TOP LED 3528




taping: 8 mm tape with 2000/reel,

viewing angle: Lambertian Emitter (120°)

Welding: IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

Package Outlines

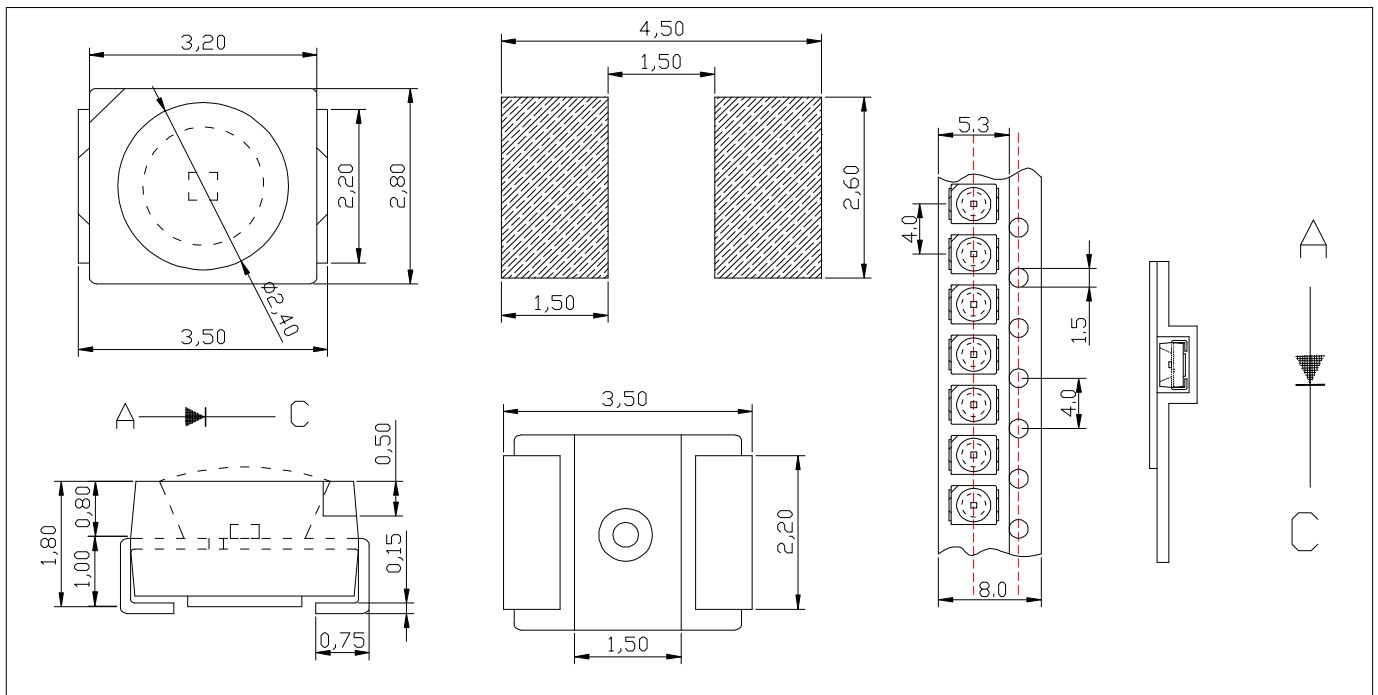

Note: 1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.1mm unless otherwise noted.

Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
3528W TOP	White	$I_F = 30mA$	X0.30/Y0.30	1000-2600mcd
3528R TOP	Red	$I_F = 30mA$	615-645nm	220-600mcd
3528Y TOP	Yellow	$I_F = 30mA$	586-592nm	220-600mcd
3528TG TOP	True Green	$I_F = 30mA$	515-525nm	800-1600mcd
3528B TOP	Blue	$I_F = 30mA$	460-475nm	180-420mcd

Note: Please contact the salesman for detailed specifications!