



TOP LED 5050




taping: 12 mm tape with 1000/reel,

viewing angle: Lambertian Emitter (120°)

Welding: IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

Package Outlines

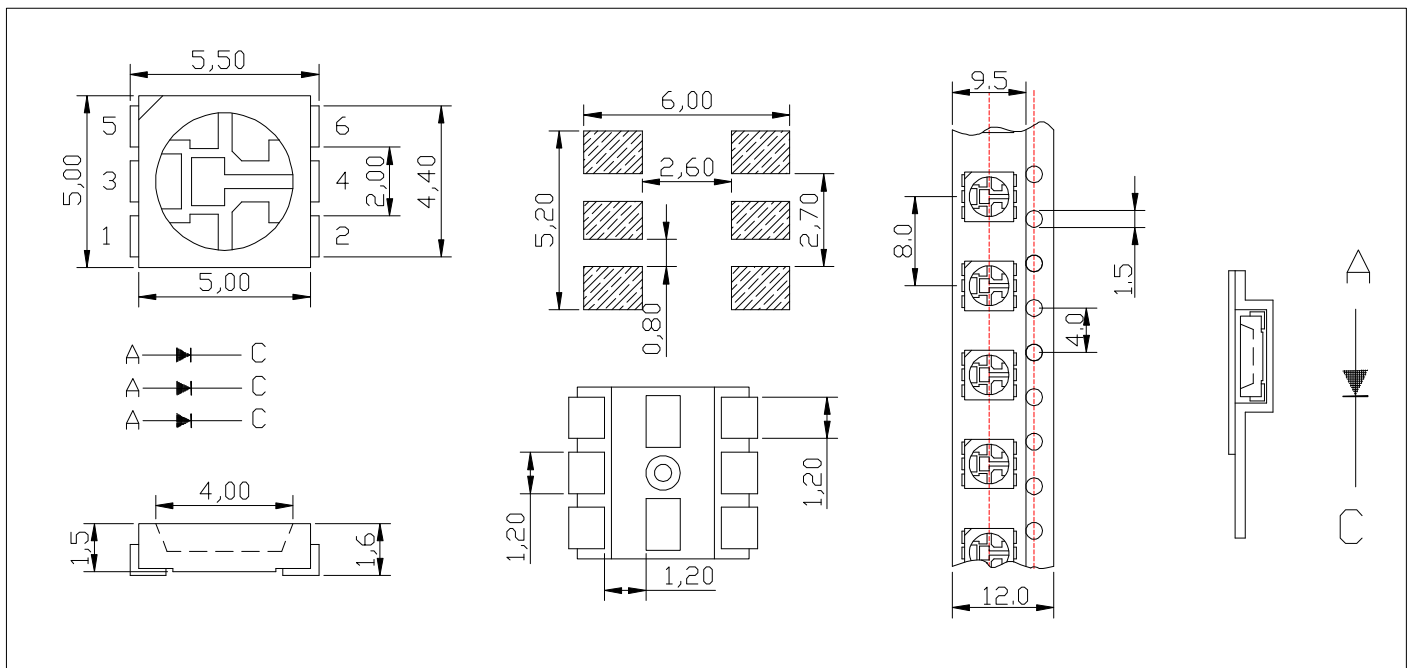

Note: 1. All dimensions are in millimeters (inches).
 2. Tolerance is ±0.1mm unless otherwise noted.

Ordering Information

Type	Color of Emission	Adaptation current	Brightness Group	Wavelength
5050W TOP	White	$I_F = 20mA \times 3$	X0.30/Y0.30	15-28LM
5050R TOP	Red	$I_F = 20mA \times 3$	615-645nm	6-12LM
5050Y TOP	Yellow	$I_F = 20mA \times 3$	586-592nm	6-12LM
5050TG TOP	True Green	$I_F = 20mA \times 3$	515-525nm	10-22LM
5050B TOP	Blue	$I_F = 20mA \times 3$	460-475nm	4-10LM

Note: Please contact the salesman for detailed specifications!