




LAMP LED 5MM

Packing: anti-static bag, 1000/bag

viewing angle: Lambertian Emitter (15-90°)

Welding: IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

Package Outlines

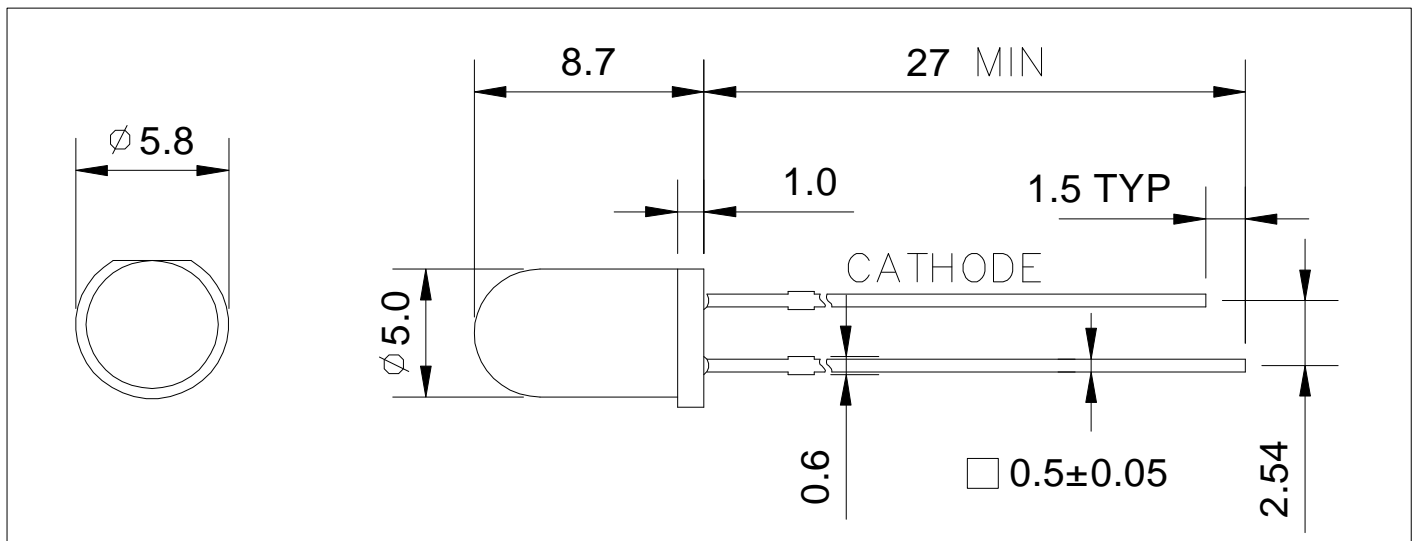

Note: 1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.1 mm unless otherwise noted.

Ordering Information

| Type | Color of Emission | Adaptation current | Brightness Group | Wavelength |
|----------|-------------------|--------------------|------------------|---------------|
| 5MM LAMP | White | $I_F = 20mA$ | X0.30/Y0.30 | 1000-22000mcd |
| 5MM LAMP | Red | $I_F = 20mA$ | 615-645nm | 400-6000mcd |
| 5MM LAMP | Yellow | $I_F = 20mA$ | 586-592nm | 300-5800mcd |
| 5MM LAMP | Yellow Green | $I_F = 20mA$ | 565-576nm | 82-600mcd |
| 5MM LAMP | True Green | $I_F = 20mA$ | 515-525nm | 1000-18000mcd |
| 5MM LAMP | Blue | $I_F = 20mA$ | 460-475nm | 300-5800mcd |

Note: Please contact the salesman for detailed specifications!