



## TOP LED 5730




**taping:** 12 mm tape with 4000/reel,

**viewing angle:** Lambertian Emitter (120°)

**Welding:** IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

### Package Outlines

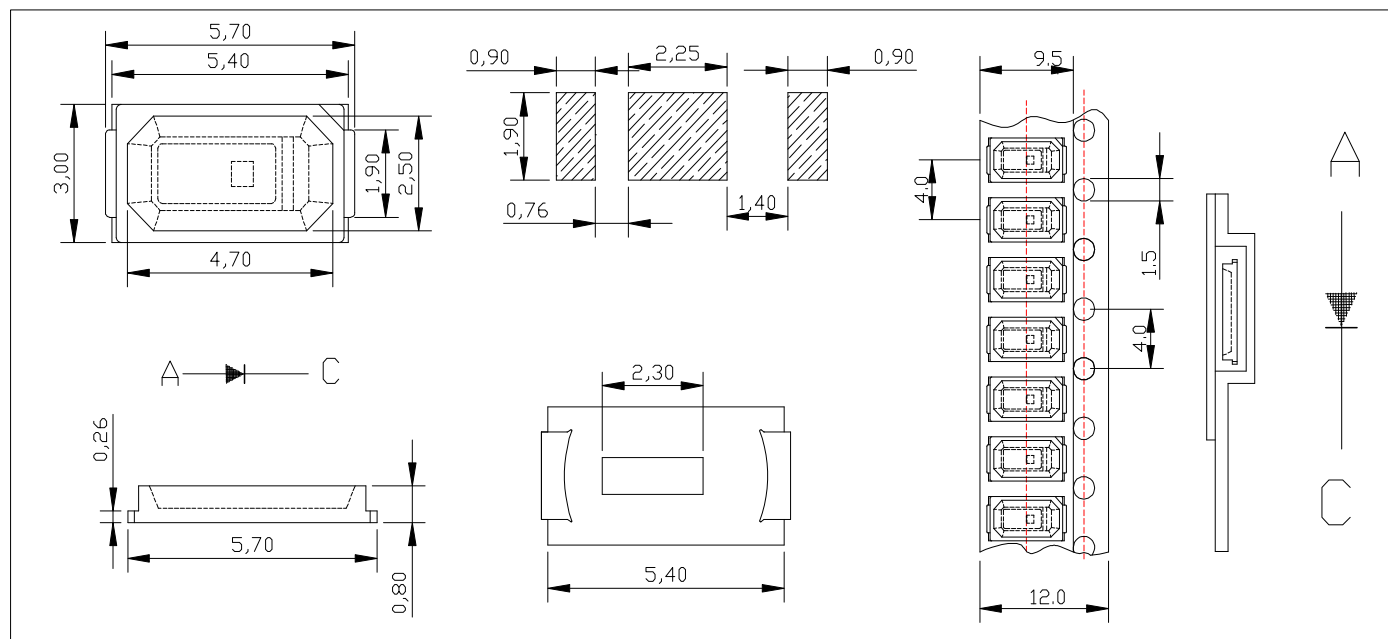

*Note:* 1. All dimensions are in millimeters (inches).  
2. Tolerance is ±0.1mm unless otherwise noted.

### Ordering Information

| Type       | Color of Emission | Adaptation current | Brightness Group | Wavelength |
|------------|-------------------|--------------------|------------------|------------|
| 5050W TOP  | White             | $I_F = 150mA$      | X0.30/Y0.30      | 30-55LM    |
| 5050R TOP  | Red               | $I_F = 150mA$      | 615-645nm        | 10-18LM    |
| 5050Y TOP  | Yellow            | $I_F = 150mA$      | 586-592nm        | 10-18LM    |
| 5050TG TOP | True Green        | $I_F = 150mA$      | 515-525nm        | 20-35LM    |
| 5050B TOP  | Blue              | $I_F = 150mA$      | 460-475nm        | 6-12LM     |

**Note:** Please contact the salesman for detailed specifications!