



## LAMP LED 2\*5\*7MM




**Packing:** anti-static bag, 1000/bag

**viewing angle:** Lambertian Emitter (30-110°)

**Welding:** IR Reflow Soldering Profile for lead free soldering, 260°C±5°C for 3 -5seconds. Wave soldering lead-free soldering 260°C±5°C for 3 -5seconds. Manual lead-free soldering 360°C±5°C for 2-3 seconds.

### Package Outlines

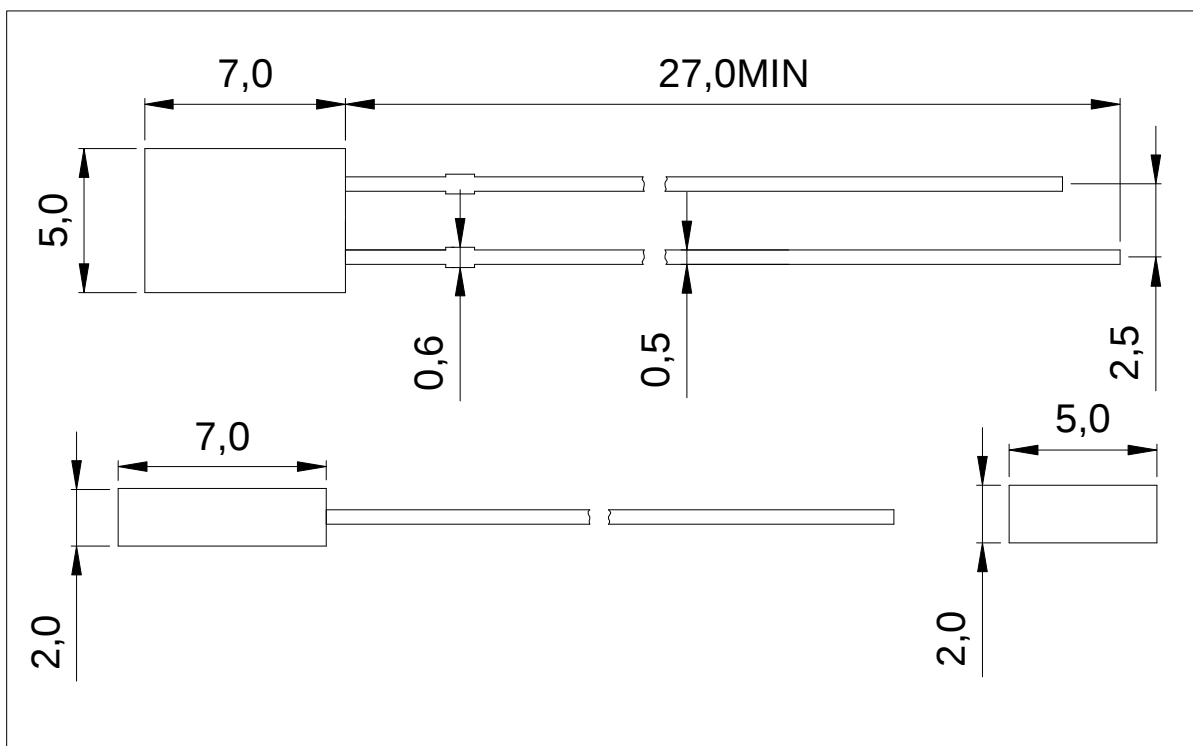

Note: 1. All dimensions are in millimeters (inches).  
2. Tolerance is ±0.1mm unless otherwise noted.

### Ordering Information

| Type         | Color of Emission | Adaptation current | Brightness Group | Wavelength  |
|--------------|-------------------|--------------------|------------------|-------------|
| 2*5*7MM LAMP | White             | $I_F = 20mA$       | X0.30/Y0.30      | 600-8200mcd |
| 2*5*7MM LAMP | Red               | $I_F = 20mA$       | 615-645nm        | 120-1600mcd |
| 2*5*7MM LAMP | Yellow            | $I_F = 20mA$       | 586-592nm        | 100-1400mcd |
| 2*5*7MM LAMP | Yellow Green      | $I_F = 20mA$       | 565-576nm        | 16-500mcd   |
| 2*5*7MM LAMP | True Green        | $I_F = 20mA$       | 515-525nm        | 450-6800mcd |
| 2*5*7MM LAMP | Blue              | $I_F = 20mA$       | 460-475nm        | 100-1400mcd |

**Note:** Please contact the salesman for detailed specifications!